



V7

PELLET PREMIUM




5 years warranty

5

Compact size



Four plate heat exchanger



Automatic cleaning system(option)



Pellet burner



Controller
BRAGER PELE BORD 780



Parametr		V7 PREMIUM	Parametr		V7 PREMIUM
Nominal power	<i>kW</i>	15	Boiler weight	<i>kg</i>	300
Heating surface	<i>m²</i>	1,6	Boiler water capacity	<i>l</i>	50
Area of heated rooms	<i>m²</i>	60-180	Fuel tank capacity	<i>l</i>	160
Heating efficiency	<i>%</i>	>88	Heigh to flue	<i>mm</i>	790
Maximal working pressure	<i>Bar</i>	2	Total height	<i>mm</i>	1070
Chimney draft	<i>Pa</i>	20	Lenght	<i>mm</i>	940
Boiler working temperature	<i>C °</i>	55-80	Width with fuel tank	<i>mm</i>	1010
Flue dimmension	<i>mm</i>	180	Boiler efficiency class		5
Supply and return pipes diameter	<i>cal</i>	G 1 1/2"			

V7

PLUS PELLET

5 years warranty

5

Compact size



Special boiler steel -
P265GH




Afterburning
system(option)



Pellet burner



Controller
BRAGER PELE BORD 780

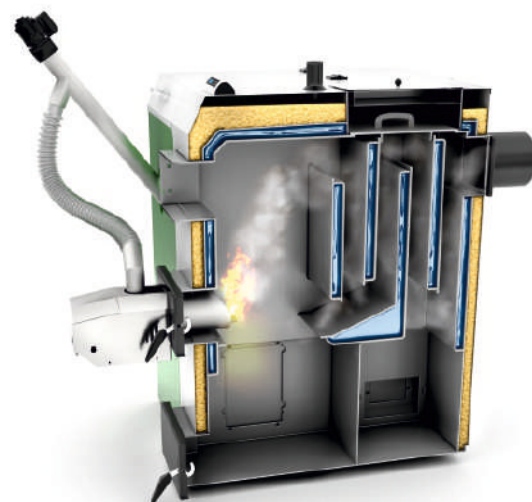

Parametr		V7PP 19	V7PP 38	V7PP 76	Parametr		V7PP 19	V7PP 38	V7PP 76
Nominal power	<i>kW</i>	19	38	76	Boiler weight	<i>kg</i>	400	530	930
Heating surface	<i>m²</i>	2	3,7	7,6	Boiler water capacity	<i>l</i>	65	110	240
Area of heated rooms	<i>m²</i>	70-210	180-360	350-750	Fuel tank capacity	<i>l</i>	360	380	500
Heating efficiency	%	>89	>89	>89	Heigh to flue	<i>mm</i>	865	1100	1410
Maximal working pressure	<i>Bar</i>	1,5	1,5	1,5	Total height	<i>mm</i>	1200	1350	1690
Chimney draft	<i>Pa</i>	20	31	38	Lenght	<i>mm</i>	1400	1610	1960
Boiler working temperature	<i>C °</i>	55-90	55-90	55-90	Width with fuel tank	<i>mm</i>	1125	1155	1440
Flue dimmension	<i>mm</i>	180	180	250	Boiler efficiency class		5	5	5
Supply and return pipes diameter	<i>cal</i>	G 1 1/2"	G 1 1/2"	G 2"					

V7 16




5 years warranty

5

Compact size



Four plate heat exchanger



Automatic cleaning system(option)




Wi-fi connection (option)



Retort ecodesing burner



Controller
BRAGER OXI BORD 780

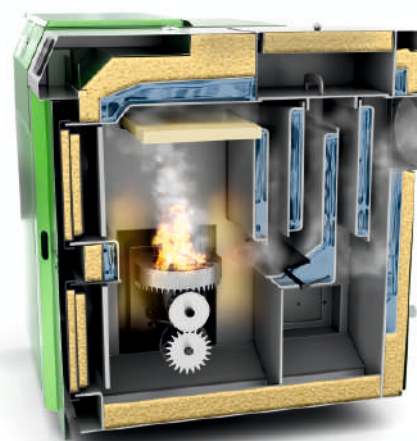

Parametr		V7 16	Parametr		V7 16
Nominal power	<i>kW</i>	16	Boiler weight	<i>kg</i>	300
Heating surface	<i>m²</i>	3	Boiler water capacity	<i>l</i>	65
Area of heated rooms	<i>m²</i>	140-200	Fuel tank capacity	<i>l</i>	150
Heating efficiency	%	> 85	Heigh to flue	<i>mm</i>	865
Maximal working pressure	<i>Bar</i>	2	Total height	<i>mm</i>	1135
Chimney draft	<i>Pa</i>	20	Lenght	<i>mm</i>	1125
Boiler working temperature	<i>C °</i>	55-85	Width with fuel tank	<i>mm</i>	1135
Flue dimmension	<i>mm</i>	180	Boiler efficiency class		5
Supply and return pipes diameter	<i>cal</i>	G 1 1/2"			Ano

V6

8/10/12



5 years warranty

5

Double plate heat exchanger



Compact size



Wi-fi connection(option)



Automatic cleaning system(option)



Retort ecodesing burner



Controller
BRAGER OXI BORD 780



Parametr		V6 8/10/12			Parametr		V6 8/10/12		
Nominal power	<i>kW</i>	8			Boiler weight	<i>kg</i>	185		
Heating surface	<i>m²</i>	1,3			Boiler water capacity	<i>l</i>	41		
Area of heated rooms	<i>m²</i>	<80	<100	<120	Fuel tank capacity	<i>l</i>	150		
Heating efficiency	%	91			Heigh to flue	<i>mm</i>	800		
Maximal working pressure	<i>Bar</i>	2			Total height	<i>mm</i>	1100		
Chimney draft	<i>Pa</i>	25			Lenght	<i>mm</i>	900		
Boiler working temperature	<i>C °</i>	50-85			Width with fuel tank	<i>mm</i>	1100		
Flue dimmension	<i>mm</i>	160			Boiler efficiency class		5		
Supply and return pipes diameter	<i>cal</i>	G 1 1/2"							

V6

14/16



5 years warranty

5

Double plate heat exchanger



High efficiency



Automatic cleaning system(option)




Wi-fi connection(option)



Retort ecodesing burner



Controller
BRAGER OXI BORD 780

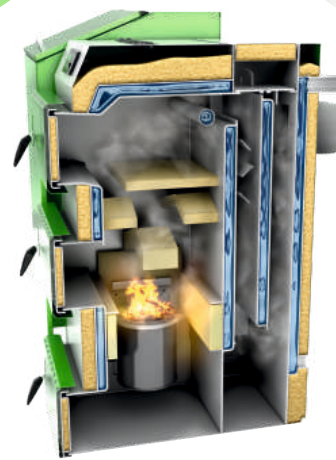

Parametr		V6 14/16	Parametr		V6 14/16
Nominal power	<i>kW</i>	16	Boiler weight	<i>kg</i>	380
Heating surface	<i>m²</i>	1,6	Boiler water capacity	<i>l</i>	60
Area of heated rooms	<i>m²</i>	<140 <160	Fuel tank capacity	<i>l</i>	200
Heating efficiency	%	>86	Heigh to flue	<i>mm</i>	915
Maximal working pressure	<i>Bar</i>	2	Total height	<i>mm</i>	1245
Chimney draft	<i>Pa</i>	25	Lenght	<i>mm</i>	990
Boiler working temperature	<i>C °</i>	50-85	Width with fuel tank	<i>mm</i>	1100
Flue dimmension	<i>mm</i>	180	Boiler efficiency class		5
Supply and return pipes diameter	<i>cal</i>	G 1 1/2"			

V6

PELLET MINI



5 years warranty

5

Big fuel tank



Pipe heat exchanger with manual cleaning



Boiler available in power: 13, 15, 16, 20, 24, 25, 28, 30, 32, 35, 40, 45 kW



Pellet burner



Controller
BRAGER PELE BORD 780



Parametr		V6 PELLET MINI 13-16	V6 PELLET MINI 20-25	V6 PELLET MINI 28-35	V6 PELLET MINI 40-45	Parametr		V6 PELLET MINI 13-16	V6 PELLET MINI 20-25	V6 PELLET MINI 28-35	V6 PELLET MINI 40-45
Nominal power	kW	13-16	20-25	28-35	40-45	Boiler weight	l	91	107	241	293
Heating surface	m ²	do 200	do 300	do 400	do 400	Boiler water capacity	l	300/700/1000			
Area of heated rooms	%	>94,1	>92,2	>92,8	>93	Fuel tank capacity	mm	1300	1400	1400	1600
Heating efficiency	Bar	2,5	2,5	2,5	2,5	Heigh to flue	mm	1400	1400	1600	1800
Maximal working pressure	Pa	15	15	20	20	Total height	mm	100	100	1200	1200
Chimney draft	C °	55-90	55-90	50-90	50-90	Lenght	mm	300 L- (1220x660), 700 L- (1660x890, 1000 L- (1660x1040)			
Boiler working temperature	mm	200	200	200	200	Width with fuel tank	mm	800	800	900	900
Flue dimmension	cal	G 1 1/4"	G 1 1/4"	G 1 1/4"	G 1 1/4"	Boiler efficiency class		5	5	5	5
Supply and return pipes diameter	kg	250	265	400	435						

V6

PELLET

MINI COMPACT



5 years warranty

5

Compact size



Pipe heat exchanger with manual cleaning




Boiler available in power: 13, 15, 16, 20, 24, 25, 28, 30, 32, 35, 40, 45 kW



Pellet burner



Controller
BRAGER PELE BORD 780

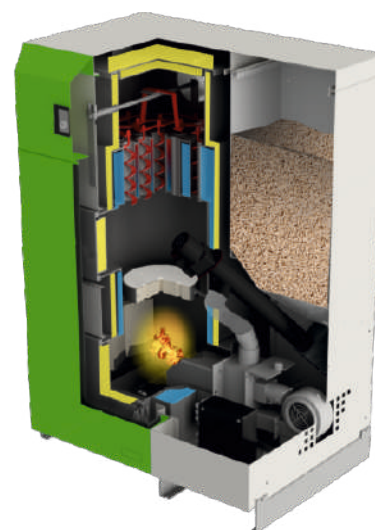

Parametr	J.M.	V6 PELLET MINI 13-16	V6 PELLET MINI 20-24	Parametr	J.M.	V6 PELLET MINI	V6 PELLET MINI
Nominal power	kW	13-16	20-24	Boiler water capacity	l	84	100
Area of heated rooms	m ²	do 200	do 300	Fuel tank capacity	l	300	300
Heating efficiency	%	>90	>90	Heigh to flue	mm	1300	1400
Maximal working pressure	Bar	2,5	2,5	Total height	mm	1400	1400
Chimney draft	Pa	15	15	Lenght	mm	800	800
Boiler working temperature	C °	55-90	55-90	Width with fuel tank	mm	1100	1100
Flue dimmension	mm	200	200	Width	mm	700	700
Supply and return pipes diameter	cal	G 1 1/4"	G 1 1/4"	Boiler efficiency class		5	5
Boiler weight	kg	340	360				

V6

20/20 PREMIUM

5 years warranty

5

High efficiency



Doble plate heat exchanger



Wi-fi connection(option)



Automatic cleaning system(option)



Retort rotary burner



Controller
BRAGER PELE BORD 780



Parametr		V6 20	V6 20 PREMIUM	Parametr		V6 20	V6 20 PREMIUM
Nominal power	<i>kW</i>	20	20	Boiler water capacity	<i>kg</i>	480	480
Heating surface	<i>m²</i>	2,85	2,85	Fuel tank capacity	<i>l</i>	80	80
Area of heated rooms	<i>m²</i>	100-230	100-230	Heigh to flue	<i>l</i>	200	200
Heating efficiency	%	>95	>95	Total height	<i>mm</i>	1315	1315
Maximal working pressure	<i>Bar</i>	2	2	Lenght	<i>mm</i>	1035	1035
Chimney draft	<i>Pa</i>	25	25	Width with fuel tank	<i>mm</i>	990	990
Boiler working temperature	<i>C °</i>	50-85	50-85	Width	<i>mm</i>	1100	1100
Flue dimmension	<i>mm</i>	180	180	Boiler efficiency class		5	5
Supply and return pipes diameter	<i>cal</i>	G 1 1/2"	G 1 1/2"				

V6

PELLET MICRO



5 years warranty

5

Compact size



Pipe heat exchanger with manual cleaning



Wi-fi connection(option)



Boiler available in power: 8, 10, 12 kW



Retort burner



Controller
BRAGER PELE BORD 780



Parametr		V6 PELLET MICRO			Parametr		V6 PELLET MICRO
Nominal power	<i>kW</i>	8	10	12	Boiler weight	<i>kg</i>	200
Area of heated rooms	<i>m²</i>	80	100	120	Boiler water capacity	<i>l</i>	48
					Fuel tank capacity	<i>l</i>	80
Heating efficiency	%	>90			Heigh to flue	<i>mm</i>	1200
Maximal working pressure	<i>Bar</i>	2,5			Total height	<i>mm</i>	1300
Chimney draft	<i>Pa</i>	10-20			Lenght	<i>mm</i>	600
Boiler working temperature	<i>C °</i>	60-90			Width with fuel tank	<i>mm</i>	800
Flue dimmension	<i>mm</i>	200			Boiler efficiency class		5
Supply and return pipes diameter	<i>cal</i>	G 1 1/4"					

V4 18



5 years warranty

5

Compact size



Three-plate heat exchanger



Wi-fi connection(option)



Retort burner



Controller
BRAGER PELE BORD 780



Parametr		V4 18	Parametr		V4 18
Nominal power	<i>kW</i>	18	Boiler weight	<i>kg</i>	300
Heating surface	<i>m²</i>	2,1	Boiler water capacity	<i>l</i>	73
Area of heated rooms	<i>m²</i>	140-200	Fuel tank capacity	<i>l</i>	180
Heating efficiency	%	>85	Heigh to flue	<i>mm</i>	1100
Maximal working pressure	<i>Bar</i>	2	Total height	<i>mm</i>	1300
Chimney draft	<i>Pa</i>	20-30	Lenght	<i>mm</i>	800
Boiler working temperature	<i>C °</i>	55-85	Width with fuel tank	<i>mm</i>	1200
Flue dimmension	<i>mm</i>	200	Boiler efficiency class		5
Supply and return pipes diameter	<i>cal</i>	G 1 1/2"			

V1



5 years warranty

5

Compact size



Cast-iron heart



Vertically horizontal heat exchanger



Large door and loading chamber



Movable flue



Parametr				V1			
Nominal power	kW	15	17	19	21	23	25
Heating surface	m²	1,9			Do 2,63		
Area of heated rooms	m²	150			do 240		
Maximal working pressure	Bar	0,15			0,15		
Chimney draft	Pa	26			26		
Boiler working temperature	C°	55-99					
Flue dimmension	mm	180			180		
Supply and return pipes diameter	cal	1 1/2			1 1/2		
Boiler weight	kg	280			300		
Boiler water capacity	l	60			80		
Total height	mm	1285			1430		
Heigh to flue	mm	1120			1270		
Lenght	mm	880			1060		
Width with fuel tank	mm	540			530		
		5			5		

V1 PELLET



5 years warranty

5

Compact size



Boiler available in power :
8, 10, 12, 14, 16 kW



Wi-fi connection(option)



Pellet burner



Controller
BRAGER PELE BORD 780



Parametr		V6 PELLET MICRO					Parametr		V6 PELLET MICRO
Nominal power	<i>kW</i>	8	10	12	14	16	Boiler weight	<i>kg</i>	350
Area of heated rooms	<i>m²</i>	80	100	120	140	160	Boiler water capacity	<i>l</i>	48
							Fuel tank capacity	<i>l</i>	85
Heating efficiency	%	>87					Heigh to flue	<i>mm</i>	890
Maximal working pressure	<i>Bar</i>	2,5					Total height	<i>mm</i>	1620
Chimney draft	<i>Pa</i>	10-20					Lenght	<i>mm</i>	925
Boiler working temperature	<i>C °</i>	60-90					Width with fuel tank	<i>mm</i>	510
Flue dimmension	<i>mm</i>	133					Boiler efficiency class		5
Supply and return pipes diameter	<i>cal</i>	G 1 1/4"							

Gutter burner



- Power: 15-50 kW
- Screw feeder
- Fuel: Coal – granulation
- 5 -25 mm
- Simple, reliable construction

Pellet burner



- Power: 12-50 kW
- Screw feeder
- Fuel: pellets, crops, seeds, pits
- Automatic ash cleaning and automatic ignition system

Retort burner



- Power: 15-50 kW
- Screw feeder
- Fuel: Coal – granulation
- 5 -25 mm
- Energy saving construction

Retort burner



- Power: 17-300 kW
- Screw feeder
- Fuel: Coal – granulation
- 5 -25 mm
- Cast-iron heart

Retort ecodesing burner



- Power: 15-300 kW
- Screw feeder
- Fuel: Coal – granulation
- 5 -25 mm
- Energy saving construction

Retort rotary burner



- Power: 17-150 kW
- Screw feeder
- Fuel: Coal – granulation
- 5 -25 mm
- Coal sinter rotation system


NEW!

CONTROLLER Oxi Bord 780

CONTROLLER Pele Bord 780



- Big touchscreen
- Wi-fi connection
- Support for up to 5 pumps
- Compatible with MCE



No-stop



Multilingual
mode



Universal
output



Boiler
switch



Mixing
valve 1



Remote
controlled panel



Clock



Simple and
advanced mode



Valve
thermostat 1



STB
thermostat



Room thermostat



Time
zones



Room
control



Wi-Fi



SMS



System
upgrade



Fuel level



Valve pump



Circulation
pump



Hot water
pump



C.O. Pump



**MCE Małopolskie Centrum
Ekologiczne S.C.**

Klecza Dolna 15a (k/Wadowic)
34-124 Klecza Górna

tel.: (33) 872 24 04
tel./fax: (33) 873 25 11
NIP: 551-250-80-46

www.mce.net.pl